


## 1.50" X 1.50" Ultra-Lite Smooth Surface T-Slotted Profile - Four Open T-Slots

80/20 Inc.

### 1515-ULS Profile

1515-ULS is a 1.50" x 1.50" ultra-lite fractional 15 series square T-slot profile with four open T-slots, one on each 1.50" face. The profile is smooth, which makes it resistant to dirt and debris buildup while also being easy to clean. The 1515-ULS profile is compatible with all 15 series fasteners. This profile lends itself to clean room applications, guards, enclosures, or workstations. The four open T-slots enable access from any direction and are useful for mounting accessories.

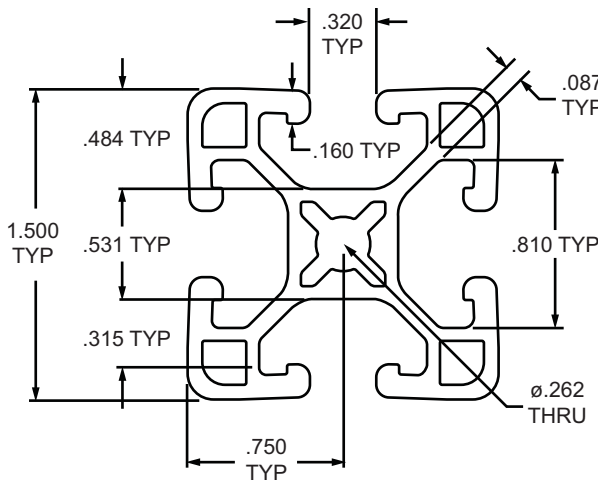

Part No.	Series	Stock Length	Material	Alloy**	Finish	Drop Lock	Moment of Inertia	Surface Area	Yield Strength	Modulus of Elasticity	Weight
1515-ULS *		145", 242"	Aluminum	6105-T5	Clear Anodize	2°	IX = 0.1765 <sup>in4</sup> IY = 0.1765 <sup>in4</sup>	2.290 in. <sup>2</sup>	35,000 psi	10,200,000 lb / in. <sup>2</sup>	0.0790 lb / in.
1515-ULS-Black *	<b>15</b>	145"			Black Anodize						
1515-ULS-Black-FB		per inch			Black Anodize						

\* The above profiles are sold per inch or stock length.

\*\* Or comparable

### Standard Machining Services

Service No.	Series	Service Description	Reference Page
7010	<b>15</b>	Cut to Length	859
7050	<b>15</b>	Access Hole	863
7040	<b>15</b>	Anchor Counterbore	865
7060	<b>15</b>	Tap Profile End	861