




## 1.50" X 1.50" Lite Smooth Surface T-Slotted Profile - Four Open T-Slots

## 1515-LS Profile

1515-LS is a 1.50" x 1.50" lite fractional 15 series square T-slot profile with four open T-slots, one on each 1.50" face. The profile is smooth, which makes it resistant to dirt and debris buildup while also being easy to clean. The 1515-LS profile is compatible with all 15 series fasteners. This profile lends itself to clean room applications, guards, enclosures, or workstations. The four open T-slots enable access from any direction and are useful for mounting accessories.

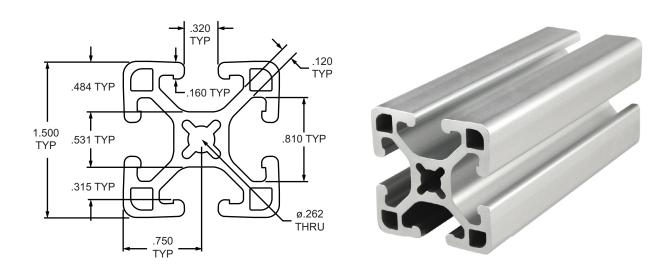

Part No.	Series	Stock Length	Material	Alloy**	Finish	Drop Lock	Moment of Inertia	Surface Area	Yield Strength	Modulus of Elasticity	Weight
1515-LS *		145", 242"			Clear Anodize						
1515-LS-Black *	15	145"	Aluminum	6105-T5	Black Anodize	2°	IX = 0.1921 <sup>"4</sup> IY = 0.1921 <sup>"4</sup>	0.882 in. <sup>2</sup>	35,000 psi	10,200,000 lb / in. <sup>2</sup>	0.0860 lb / in.
1515-LS-Black-FB		per inch			Black Anodize						

<sup>\*</sup> The above profiles are sold per inch or stock length.

## Standard Machining Services

Service No.	Series	Service Description	Reference Page		
7010	15	Cut to Length	859		
7050	15	Access Hole	863		
7040	15	Anchor Counterbore	865		
7060	15	Tap Profile End	861		

<sup>\*\*</sup> Or comparable