


80/20[®] 1.50" X 3.00" Lite Smooth Surface T-Slotted Profile - Six Open T-Slots

1530-LS Profile

1530-LS is a 1.50" x 3.00" lite fractional 15 series rectangular T-slot profile with six open T-slots, two on each 3.00" face and one on each 1.50" face. The profile is smooth, which makes it resistant to dirt and debris buildup while also being easy to clean. The 1530-LS profile is compatible with 15 series fasteners. The center cavity of the profile can be pressurized up to 150 psi, lending itself to work spaces, machine guards, displays and panel mount racks.

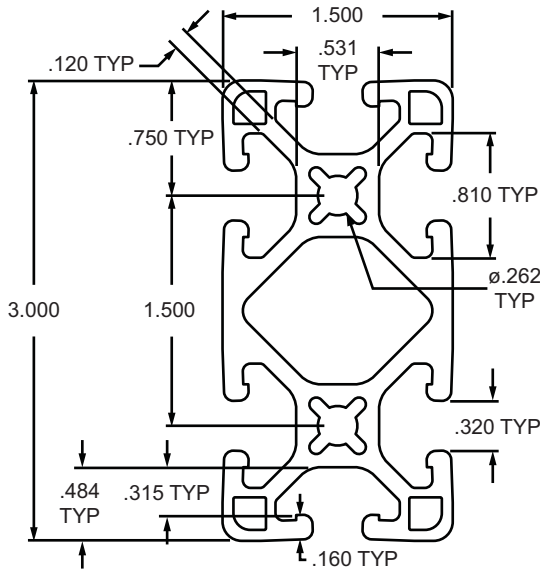

Part No.	Series	Stock Length	Material	Alloy**	Finish	Drop Lock	Moment of Inertia	Surface Area	Yield Strength	Modulus of Elasticity	Weight
1530-LS *	15	145", 242"	Aluminum	6105-T5	Clear Anodize	2°	IX = 1.3881 ¹⁴ IY = 0.4061 ¹⁴	1.682 in. ²	35,000 psi	10,200,000 lb / in. ²	0.1640 lb / in.
1530-LS-Black *		145"			Black Anodize						
1530-LS-Black-FB		per inch			Black Anodize						

* The above profiles are sold per inch or stock length.

** Or comparable

Standard Machining Services

Service No.	Series	Service Description	Reference Page
7020	15	Cut to Length	859
7050	15	Access Hole	863
7040	15	Anchor Counterbore	865
7045	15	Tap Profile End	861