


## 1.50" X 3.00" Lite T-Slotted Profile - Six Open T-Slots

### 1530-Lite Profile

1530-Lite is a 1.50" x 3.00" lite fractional 15 series rectangular T-slot profile with six open T-slots, two on each 3.00" face and one on each 1.50" face. The profile has align-a-grooves to assist in alignment when connecting profiles. The 1530-Lite profile is compatible with 15 series fasteners. The center cavity of the profile can be pressurized up to 150 psi, lending itself to work spaces, machine guards, displays and panel mount racks.

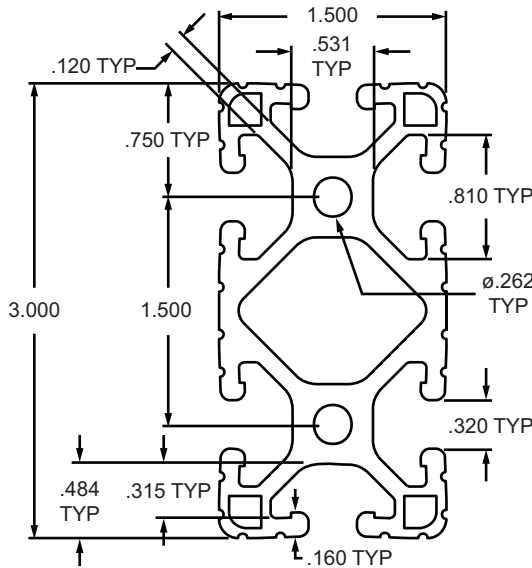

Part No.	Series	Stock Length	Material	Alloy**	Finish	Drop Lock	Moment of Inertia	Surface Area	Yield Strength	Modulus of Elasticity	Weight
1530-Lite *	<b>15</b>	97", 145", 242"	Aluminum	6105-T5	Clear Anodize	2"	IX = 1.3847 <sup>in4</sup> IY = 0.3935 <sup>in4</sup>	1.722 in. <sup>2</sup>	35,000 psi	10,200,000 lb / in. <sup>2</sup>	0.1679 lb / in.
1530-Lite-Black *		145"			Black Anodize						
1530-Lite-Black-FB		per inch			Black Anodize						
1530-Lite-Yellow *		145"			Yellow Powder Coat						

\* The above profiles are sold per inch or stock length.

\*\* Or comparable

### Standard Machining Services

Service No.	Series	Service Description	Reference Page
7020	<b>15</b>	Cut to Length	859
7050	<b>15</b>	Access Hole	863
7040	<b>15</b>	Anchor Counterbore	865
7045	<b>15</b>	Tap Profile End	861