




# 2-WAY NORMALLY-CLOSED VALVES, IN-LINE & MANIFOLD MOUNT

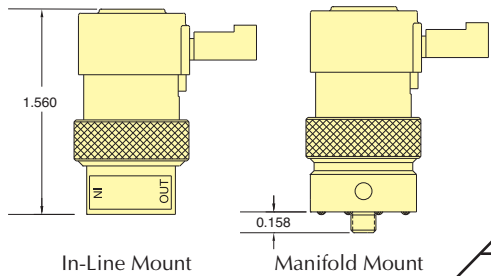

In-Line Mount	Manifold Mount	Pressure Range		Voltage		Part No.		
		Vac. to 105 psig	Vac. to 50 psig	Vac. to 25 psig	12 VDC	24 VDC	In-Line Mount	Manifold Mount
		•			•		* <a href="#">EC-2-12</a>	* <a href="#">EC-2M-12</a>
		•			•		* <a href="#">EC-2-24</a>	* <a href="#">EC-2M-24</a>
			•		•		* <a href="#">EC-2-12-L</a>	* <a href="#">EC-2M-12-L</a>
			•		•		* <a href="#">EC-2-24-L</a>	* <a href="#">EC-2M-24-L</a>
				•	•		* <a href="#">EC-2-12-H</a>	* <a href="#">EC-2M-12-H</a>
			•	•		* <a href="#">EC-2-24-H</a>	* <a href="#">EC-2M-24-H</a>	
		•			•		* <a href="#">ET-2-12</a>	* <a href="#">ET-2M-12</a>
		•			•		* <a href="#">ET-2-24</a>	* <a href="#">ET-2M-24</a>
			•		•		* <a href="#">ET-2-12-L</a>	* <a href="#">ET-2M-12-L</a>
			•		•		* <a href="#">ET-2-24-L</a>	* <a href="#">ET-2M-24-L</a>
				•	•		* <a href="#">ET-2-12-H</a>	* <a href="#">ET-2M-12-H</a>
			•	•		* <a href="#">ET-2-24-H</a>	* <a href="#">ET-2M-24-H</a>	
		•			•		* <a href="#">EV-2-12</a>	* <a href="#">EV-2M-12</a>
		•			•		* <a href="#">EV-2-24</a>	* <a href="#">EV-2M-24</a>
			•		•		* <a href="#">EV-2-12-L</a>	* <a href="#">EV-2M-12-L</a>
			•		•		* <a href="#">EV-2-24-L</a>	* <a href="#">EV-2M-24-L</a>
				•	•		* <a href="#">EV-2-12-H</a>	* <a href="#">EV-2M-12-H</a>
			•	•		* <a href="#">EV-2-24-H</a>	* <a href="#">EV-2M-24-H</a>	
		•			•		* <a href="#">EW-2-12</a>	* <a href="#">EW-2M-12</a>
		•			•		* <a href="#">EW-2-24</a>	* <a href="#">EW-2M-24</a>
			•		•		* <a href="#">EW-2-12-L</a>	* <a href="#">EW-2M-12-L</a>
			•		•		* <a href="#">EW-2-24-L</a>	* <a href="#">EW-2M-24-L</a>
				•	•		* <a href="#">EW-2-12-H</a>	* <a href="#">EW-2M-12-H</a>
			•	•		* <a href="#">EW-2-24-H</a>	* <a href="#">EW-2M-24-H</a>	

**Medium:** Clean, dry air (40 micron filter)  
**Power Consumption:** 0.67 watt (CR Series: 1.2 watt)  
**Temperature Range:** 32 to 180°F; CR Series: 32 to 150°F  
**Response:** 5 to 10 milliseconds (nominal)  
**Operating Range:** 90 to 150% of rated voltage (CR Series: ±10%)  
**Ports:** #10-32




Valve Series (*)	Standard	Non-Standard
Standard	(blank)	
Oxygen Clean	O-	See Pages 179 & 180 for further information
Analytical Series**	A-	
Corrosion-Resistant (not std. on "EW")	CR-	
<b>Options (add to end of Part No.)</b>		
FKM Seals	-V	
EPR Seals		-E
Silicone Seals		-S
Diode		-D

Example Part No's:  
 ET-2M-12-V  
 CR-ET-2-12

See Page 181 for mounting options

\*\* Available on manifold mount valves only

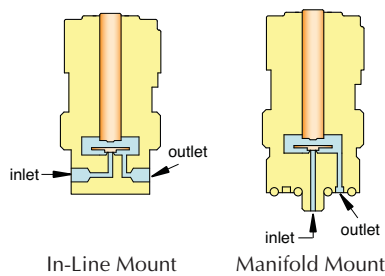

Pressure Range	Suffix	Air Flow
28" Hg Vac. to 105 psig	(blank)	0.6 scfm @ 100 psig
28" Hg Vac. to 50 psig	-L	0.5 scfm @ 50 psig
28" Hg Vac. to 25 psig	-H	0.45 scfm @ 25 psig