
## 42 Control Valves – Air Piloted Valve Actuators

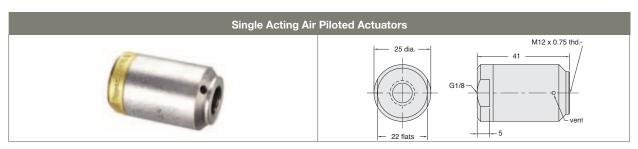

Bore Size: 22

Part No.	Description
M-MPA-7	Single Acting, Spring Return Actuator, G1/8

## Force Factor: 0.6


Construction: Body-brass; Springs- stain- M12 x 0.75 female thread to

rubber; Piston - Delrin®

less steel; Seals - Buna-N mount to Clippard miniature valves and components

Mounting:

Input Pressure 17 bar

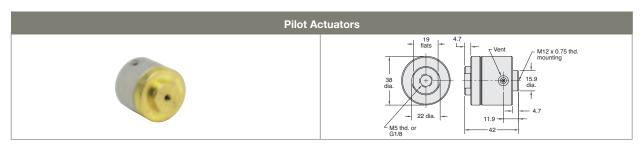

**Bore Size**: 31.7

Part No.	Description
M-MPA-10	Single Acting, Spring Return Actuator, M5
M-MPA-10P	Single Acting, Spring Return Actuator, G1/8

## Force Factor: 1.2

Input Pressure 10 bar max.

## Mounting:

M12 x 0.75 female thread to guired when assembled to mount to Clippard miniature any Clippard valve; may be valves and components; no used with 15018-2 mounspacers or washers are re- ting bracket