






Easy and intuitive desk assembly with Kick & Click™

Kick - Click - Done

Kick & Click is the new innovative mounting solution for office desks. It is an easy and intuitive way to mount the columns to the tabletop.

Simply mount the different parts, "kick" them together and it says "click". This means no screws and no tools for mounting.

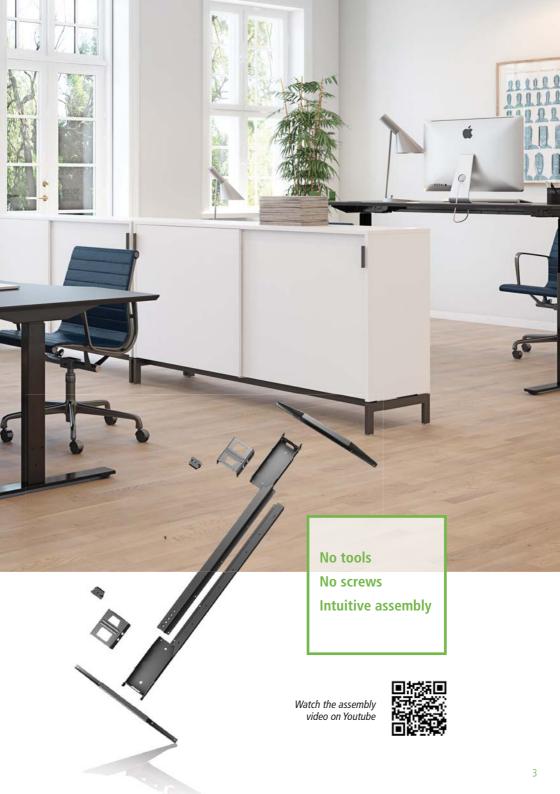

One solution Available in three versions

Kick & Click is available in three versions so you can find the solution that fits you and your desk design the best.

Kick & Click[™] **Adjustable**

- Solution for various designs.
- Telescopic design for desks ranging from 1.40 m - 2.0 m width.

Kick & Click™ **Fixed**

- Compact solution for small desks with width of 1.20 m.
- Ideal for e.g. touchdown and multi-user desks.



Freedom to design

With Kick & Click[™] there are no limitations. It is one solution, but it gives you various design options. We give you freedom to design, because we know that great products enable great design.

Choose between eight LINAK columns



DI 5 Speed:

Max thrust: Stroke length: Built-in dim:

38 mm/sec. 800 N/leg 500 mm 645 mm

DI 6

Speed: Max thrust: Stroke length: Built-in dim:

38 mm/sec. 800 N/leg 650 mm 560 mm

DI 8

Speed: Max thrust: Stroke length: Built-in dim:

38 mm/sec. 800 N/leg 500 mm 645 mm

DI 9

Speed: Max thrust: Stroke length: Built-in dim:

38 mm/sec. 800 N/leg 650 mm 560 mm

Choose between T-Desk or C-Desk design

The flexible position of the cantilever enables T-Desk or C-Desk designs. Simply place the columns either centrally or off-centre. Pre-marked positions on the cantilever guides you easily through the assembly. Of course, this counts for all three Kick & Click versions.



T-Desk with columns placed centrally.



C-Desk with columns placed off-centre.



DL10 Speed: Max thrust:

Stroke length: Built-in dim:

38 mm/sec. 800 N/leg 500 mm 645 mm

DL11

Speed: Max thrust: Stroke length: Built-in dim:

38 mm/sec. 800 N/leg 650 mm 560 mm

Max thrust: Stroke length: Built-in dim:

DL15

38 mm/sec. Speed: 800 N/leg 500 mm 645 mm


DL16

Speed: Max thrust: Stroke length: Built-in dim:

38 mm/sec. 800 N/leg 650 mm 560 mm

Easy cable management

Easy to hide away cables with no usage of tools or screws.







For more information

please vist our website www.linak.as/kickandclic

Terms of use

The user is responsible for determining the suitability of LINAK products for a specific application. LINAK takes great care in providing accurate and up-to-date information on its products. However, due to continuous development in order to improve its products, LINAK products are subject to frequent modifications and changes without prior notice. Therefore, LINAK cannot guarantee the correct and actual status of said information on its products. While LINAK uses its best efforts to fulfil orders, LINAK cannot, for the same reasons as mentioned above, guarantee the availability of any particular product. Therefore, LINAK reserves the right to discontinue the sale of any product isolayed on its website or listed in its catalogues or other written material drawn up by LINAK.

All sales are subject to the Standard Terms of Sale and Delivery for LINAK. For a copy hereof, please contact LINAK.

